

ST DISPENSERS WITH METER + FILTER

MADE IN ITALY

EN. Diesel transfer station for non commercial use. Easy to install, versatile and compact these stations can be used to fill mobile tanks or interact with distribution units. Fitted with check valve, filter and nozzle support, they are also supplied with a 4 metre delivery hose (6 metres available on request) and can be integrated with a protective metal components box and water separating filter.

A complete range of accessories required for carrying out installation is also available.

ES. Estación de trasiego de gasolina. Fácil de instalar, versátil y compacta, estos sistemas pueden usarse para llenar tanques móviles o para interactuar con unidades de distribución. Está incluida la válvula de pie con filtro y porta pistola. Tubo de suministro de 4 metros de longitud (a petición unidad con 6 metros). Pueden integrarse con caja metálica de protección para componentes y con filtro separador de agua.

También están disponibles todos los accesorios necesarios para completar la instalación.

RU. Станции перекачивания дизельного топлива для индивидуального пользования. Простые в установке, универсальные и компактные, они подойдут для комплектации передвижных или закопанных резервуаров с распределительным узлом. Они оснащаются донными клапанами с фильтром и опорой пистолета. Длина подающей трубы составляет 4 метра (по заказу 6 метров).

Их можно объединить с защитной металлической коробкой для комплектующих и с водоотделительным фильтром. Предлагаются также все принадлежности, необходимые для завершения установки.

PERFORMANCE

- Flow rate up to 85 l/min
- Accuracy: +/- 1%
- Continuous AC operation.
- Noise level below 75 dB

- Caudal de hasta 85 l/min
- Precisión: +/- 1%
- Funcionamiento CA continúa
- Nivel de ruido inferior a 75 dB

- Расход до 85 л/мин
- Погрешность измерения: +/- 1%
- Непрерывное функционирование от электросети
- Уровень шума ниже 75 дБ

PRODUCTS' RANGE WEIGHT AND PACKAGING

| Code | Weight | | Packaging | | |
|-----------------------------|--------|-----|-------------|----------------|---------|
| | kg | lbs | mm | inch | pcs/box |
| With suction hose | | | | | |
| F00386F0A | 25 | 55 | 580x380x320 | 22,8x15x12,6 | 1 |
| F00265F3A | 25 | 55 | 580x380x320 | 22,8x15x12,6 | 1 |
| F00265F0A | 26 | 57 | 580x380x320 | 22,8x15x12,6 | 1 |
| F00395F0A | 32 | 71 | 545x435x340 | 21,5x17,1x13,4 | 1 |
| Without suction hose | | | | | |
| F00386F60 | 22 | 48 | 380x380x480 | 15x15x18,9 | 1 |
| F00386R70 | 22 | 48 | 380x380x480 | 15x15x18,9 | 1 |
| F00265F40 | 26 | 57 | 580x380x320 | 22,8x15x12,6 | 1 |
| F00395F60 | 32 | 71 | 545x435x340 | 21,5x17,1x13,4 | 1 |
| F00265S20 | 18 | 40 | 480x370x260 | 18,9x14,6x10,2 | 1 |
| F00265R70 | 18 | 40 | 480x370x260 | 18,9x14,6x10,2 | 1 |



Flow-rate


up to
85 l/min
(up to 22 gpm)

Accuracy


+/-
1%



ST Panther 56 K33 A60

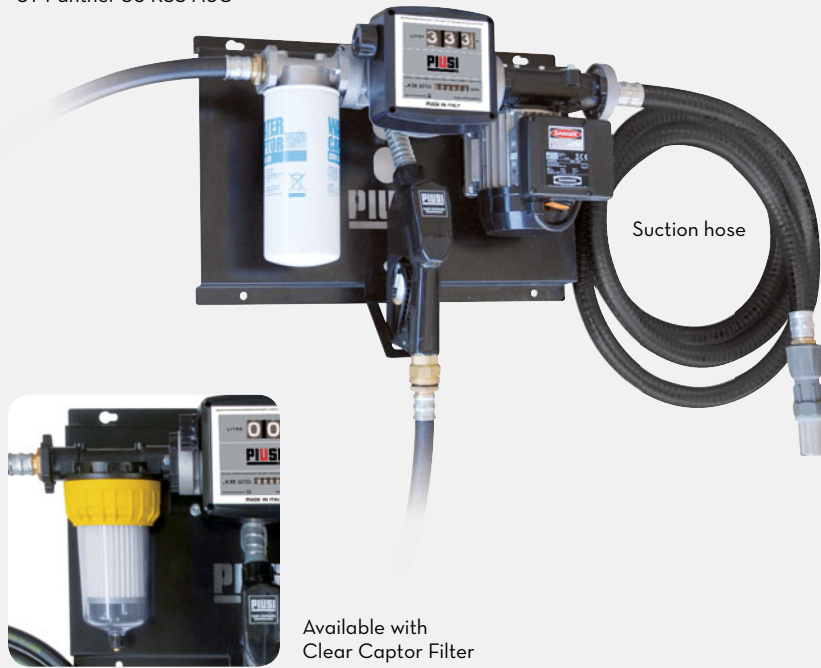

Suction hose



ST Panther72 Filter + K24 meter

Available with
Clear Captor Filter

FEATURES

Water captor



Meter K33



Automatic nozzle



Meter K24 AL



AC pump Panther 56 or 70



AC pump E 120



PRODUCTS' RANGE TECHNICAL DATA

| Code | Description | Fluids type | Flow-rate | | Voltage | | | Meter mod. | Nozzle type | Filter H ₂ O filter | Inlet BSP | Hose | | |
|-----------------------------|---------------------------------|-------------|-----------|-----|------------------|------------|-----------|------------|-------------|--------------------------------|-----------|--------|------|--------------|
| | | | l/min | gpm | AC V./Hz DC Volt | Power Watt | Amp. max. | | | | | length | Ø | Suction hose |
| With suction hose | | | | | | | | | | | | | | |
| F00386F0A | ST Panther 56 Filter + A60 | D | 52 | 14 | 230/50 | 350 | 3 | K33 | Aut. | YES | 1" | 6 m | 3/4" | 4 m |
| F00265F3A | ST Panther72+Clear Captor+A60 | D | 52 | 14 | 230/50 | 500 | 4,2 | K33 | Aut. | YES | 1" | 6 m | 3/4" | 4 m |
| F00265F0A | ST Panther72 Filter + A60 | D | 70 | 18 | 230/50 | 500 | 4,2 | K33 | Aut. | YES | 1" | 6 m | 3/4" | 4 m |
| F00395F0A | ST E120 Filter + A120 | D | 85 | 22 | 230/50 | 1150 | 5,7 | K33 | Aut. | YES | 1" | 6 m | 1" | 4 m |
| Without suction hose | | | | | | | | | | | | | | |
| F00386F60 | ST Panther56 Filter + A60 | D | 52 | 14 | 230/50 | 350 | 3 | K33 | Aut. | YES | 1" | 6 m | 3/4" | - |
| F00386R70 | ST Panther56+Clear Captor+A60 | D | 52 | 14 | 230/50 | 350 | 3 | K33 | Aut. | YES | 1" | 6 m | 3/4" | - |
| F00265F40 | ST Panther72 Filter + A60 | D | 70 | 18 | 230/50 | 500 | 4,2 | K33 | Aut. | YES | 1" | 6 m | 3/4" | - |
| F00395F60 | ST E120 Filter + A120 | D | 85 | 22 | 230/50 | 1150 | 5,7 | K33 | Aut. | YES | 1" | 6 m | 1" | - |
| F00265S20 | ST Panther72 Filter + K24 meter | D | 70 | 18 | 230/50 | 500 | 4,2 | K24 | Aut. | YES | 1" | 6 m | 3/4" | - |
| F00265R70 | ST Panther72+Clear Captor+A80 | D | 70 | 18 | 230/50 | 500 | 4,2 | K24 | Aut. | YES | 1" | 6 m | 3/4" | - |

The units can also be supplied for operating under different voltages and without meter.

DISPENSERS

PUMPS

METERS

NOZZLE METERS

NOZZLE

SPECIAL EQUIPMENTS

FLUID MONITORING

ACCESSORIES

FILTERING